

Perkins series

P150D5

50 Hz @ 1500rpm,3-phase/5-wiring



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- China Compulsory Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Perkins engine 1106A-70TAG2
- Close coupled to a Leroy Somer alternator LSA44.3L10
- Microprocessor control module PLC-7420
- NADER main circuit breaker: 250A
- Rotate speed governor: Mechanical governor
- Excitation system: Self excited , SHUNT
- A.V.R model: R250
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

- 1x12V/120AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Steel base frame with forklifts
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 14 hours running
- Drain points for fuel tank
- Operation Manual / Specifications

3 Equipment Specification

General technical data

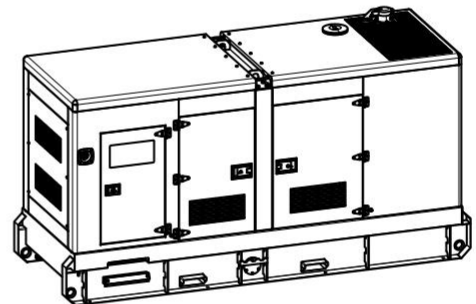


1000023135-AP1-B8

Model.....P150D5
Structure type..... R
Tank capacity.....420L
Dry weight.....2600kg
Noise level @7m N/A
Dimensions L×W×H..... 3468x1222x1843mm
Standby Power 165kVA/132kW
Prime Power..... 150kVA/120kW

Voltage	380V	400V	415V	440V	
Ampere	227.9A	216.5A	208.7A	196.8A	
Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	N/A	18.5	24.5	29.5	31.5


Diesel Engine



1000169998-AP1-A1

Engine Manufacturer/Brand	Perkins
Engine Model	1106A-70TAG2
Dimensions L×W×H	1763×756×1142mm
Dry Weight (approx.)	788kg
Number of Cylinders	6
Bore	105mm
Stroke	135mm
Displacement	7.01L
Compression Ratio	17
Type of Injection	Direct injection
Intake System	Turbocharged and air charge cooled
Intake Resistance	≤8kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	12V
Type of Fuel	ASTM D975, Class 1D & Class 2D
Type of Oil	API-CH4/ACEA E5
Oil Capacity	16.5L
Type of Coolant	Glycol mixture
Coolant Capacity	21L
Heat Rejected To Exhaust System ..	109kW(6104BTU/min)
Heat Rejected To Water&Oil	60kW(3360BTU/min)
Back Pressure	N/A
Standby Power	144kW
Prime Power	130kW
Fuel Consumption(100%load)	29.5L/h

Alternator




1000072111-AP1-A1

Alternator Manufacturer/Brand	Leroy Somer
Alternator Model	LSA44.3L10
Exciter	Brushless
Cooling Fan	Cast alloy aluminum
Windings	100% copper
Insulation Class	H
Winding Pitch	2/3
Terminals	12
Drip Proof	IP23
Altitude	≤1000m
Overspeed	2250rpm
Air Flow	0.25m³/s(50Hz), 0.3m³/s(60Hz)
Voltage Regulation	±0.5%
Total harmonic TGH / THC at no load < 2 % - on load < 5%	
Telephone Interference	THF<2%;TIF<50

PLC-7420 Control System

1000093084-AP1-F3

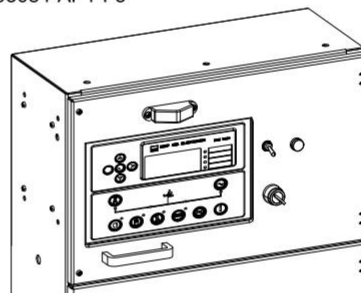


PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol




4 Overall Dimensions

1000023135-DR1-B8

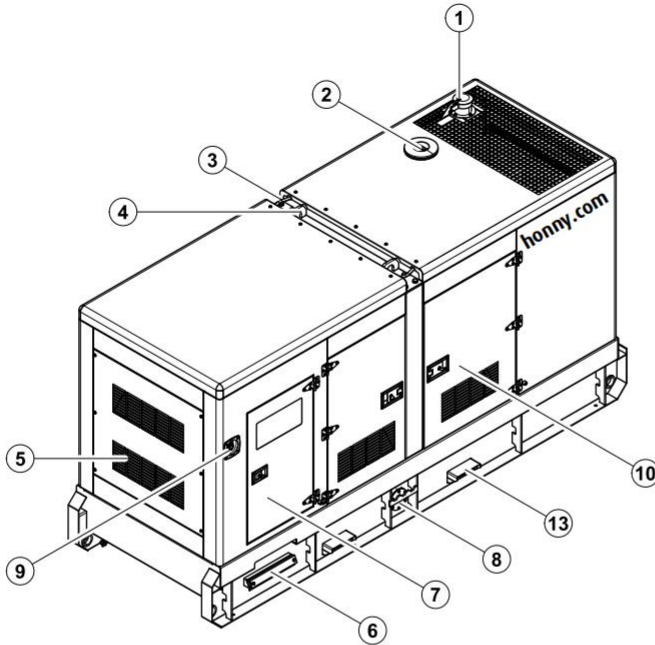


Dry weight	2600kg
Fuel tank capacity	420L
Dimensions L x W x H	3468x1222x1843mm


- ⑧ Fuel drain
- ⑦ Control cabinet
- Cable trench
- ⑤ Air inlet
- ④ Lifting lug
- ③ Roping lug
- Coolant inlet
- ① Exhaust gas outlet
- ⑬ Oil drain hose fitting
- ⑮ External fuel inlet/return hose fitting
- ⑭ Coolant drain hose fitting
- ① Fork lift channel
- ① Base frame
- ① Tie down
- ⑩ Access door
- ⑨ Emergency stop switch

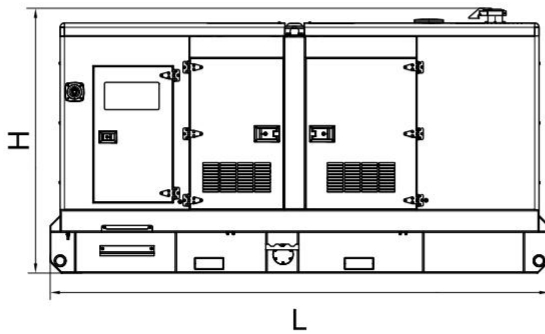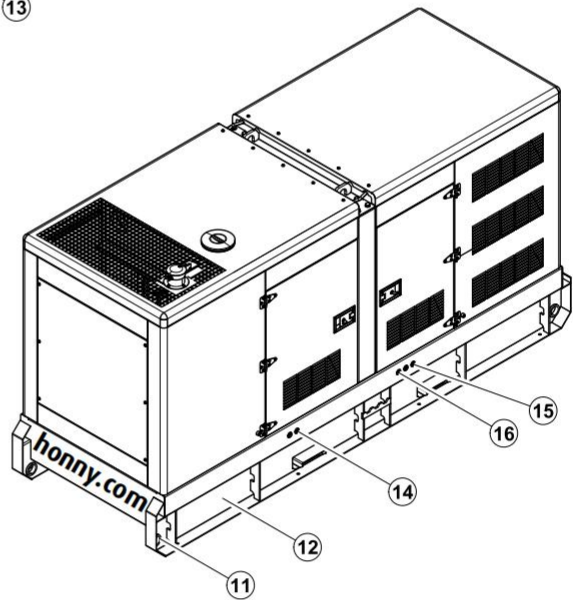

5 Control System

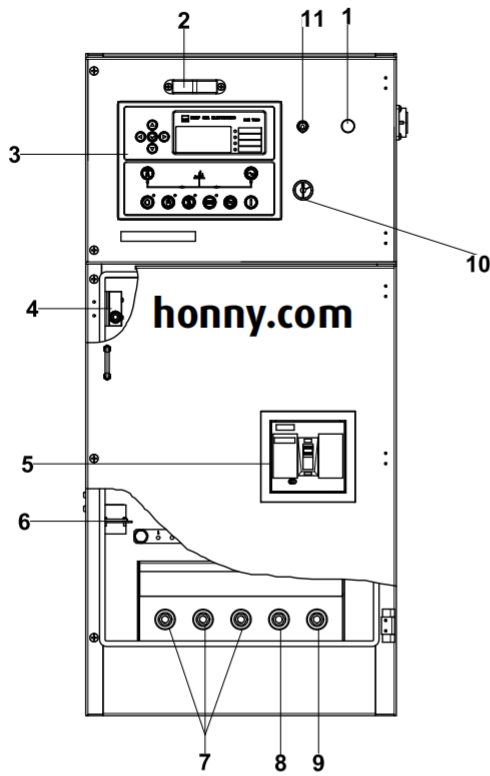

Control & field wiring cabinet

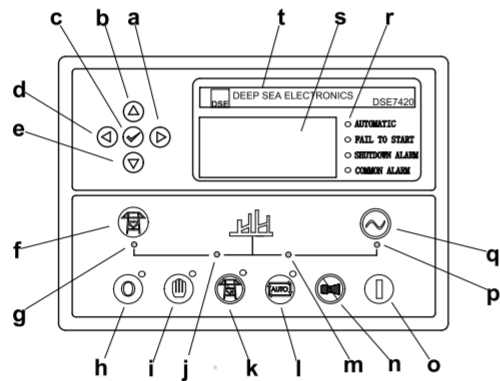

Control module

1000093084-IT1-F3

Ref.	Description
1	Charge indicator
2	Control cabinet lamp
3	PLC-7420 control module
4	Limit switch
5	Main circuit breaker
6	Mains input/remote/AMF communication connector
7	Live wire terminals
8	Neutral wire terminal
9	Ground wire terminal
10	Key switch
11	Control cabinet lamp switch

a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name